




M55F

PERFORMANCE RATING

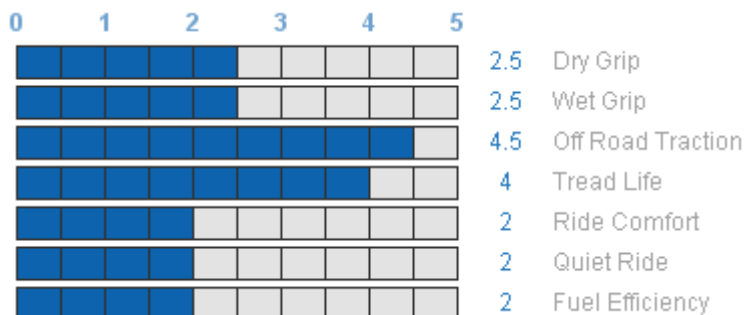

The **M55F** is Toyo Tires' all-terrain 4x4 tyre designed for four-wheel-drive commercials. The all-terrain tread pattern provides high levels of traction on a variety of surfaces, while the M55F's robust casing construction and anti-chip/cut tread compound makes it suitable for harsh conditions.

FEATURES

Aggressive block and lug tread pattern

Wide tread with square shoulders

Wide steel belts and robust casing construction

Chip, cut and wear resistant tread compound

BENEFITS

Maximum traction for dirt, sand and field work. Self-cleaning for wet and muddy conditions.

Excellent handling response with high speed stability and comfort.

Increased puncture resistance and longer tread life.

Long tread life and resistance to tread cutting and chipping, even in harsh conditions.

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS			
265/65R17 120N	14.5	784	267	365	287	381	8.00	418	7.5 - 9.5
265/70R17 121N	14.4	811	268	377	288	394	8.00	404	7.0 - 8.5
205R16 112N	13.0	745	200	346	222	362	5.50	440	5.5 - 6.5
225/75R16 115N	13.4	747	215	347	231	363	6.00	438	6.0 - 7.0
245/75R16 120N	13.9	781	250	363	272	380	7.00	419	6.5 - 7.5

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS			
265/75R16 123N	14.4	810	275	361	300	394	7.50	404	7.0 - 8.0
215/85R16 115Q	13.4	780	218	363	238	379	6.00	420	5.5 - 7.0
235/85R16 120N	13.9	812	236	378	256	395	6.50	403	5.5 - 7.0