




## **OPEN COUNTRY R/T**

### PERFORMANCE RATING – LIGHT TRUCK CONSTRUCTION

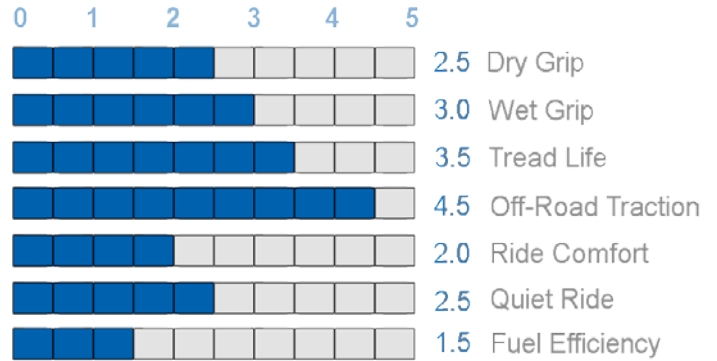

The **Open Country R/T** is a next-generation tyre that combines the extreme puncture-resistance and strength of an M/T with the long-wearing compound and sealed road performance of an A/T to service the emerging 'hybrid' tyre category. The **Open Country R/T** gives tough tourers the all-round performance required to reach the most remote locations with confidence, combining the best attributes of the Open Country A/T II and the Open Country M/T.

### FEATURES

**Next-generation hybrid tread pattern**

**3-ply polyester carcass with high turn-up ply**

**Advanced tread block design**

**Aggressive aesthetics with reduced noise**

**2 jointless, spiral-wound cap plies**

**High-speed stability and steering response**

### BENEFITS

Tight A/T-inspired centre blocks combine with self-cleaning M/T-style shoulders for traction on any terrain

Open Country M/T-style construction provides extreme puncture resistance and sharp steering response

Deep sipes and stepped block borders provide biting edges for wet traction on sealed or unsealed roads

Staggered shoulder blocks and a varied tread pattern minimise road noise while creating an aggressive profile

Excellent uniformity with exceptional strength

L-shaped interlocking blocks reduce tread flex to provide stability while turning, accelerating and braking

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS			
LT265/75R16 123Q	13.0	810	267	361	291	393	7.5	405	7.0 - 8.0
LT285/75R16 126Q	13.0	834	286	370	312	405	8.0	393	7.5 - 9.0
LT305/70R16 124Q	13.0	834	311	370	339	405	9.0	393	8.0 - 9.5
LT315/75R16 127Q	13.0	878	313	387	341	426	8.5	373	8.0 - 11.0
LT285/70R17 121Q	13.0	838	292	374	318	407	8.5	391	7.5 - 9.0
LT295/70R17 121Q	13.0	846	299	377	326	411	8.5	388	7.5 - 10.0
35x12.50R17 121Q	15.0	883	318	392	347	429	10.0	371	8.5 - 11.0
37x12.50R17 124Q	15.0	934	318	412	347	453	10.0	351	8.5 - 11.0
LT285/60R18 122Q	13.0	799	292	362	318	388	8.5	410	8.0 - 10.0
LT285/65R18 125Q	13.0	833	292	375	318	404	8.5	394	8.0 - 10.0
33x12.50R18 118Q	15.0	832	318	375	347	404	10.0	394	8.5 - 11.0
35x12.50R18 123Q	15.0	883	318	395	347	429	10.0	371	8.5 - 11.0
LT285/55R20 122Q	13.0	822	297	376	324	399	9.0	399	8.0 - 10.0
33x12.50R20 114Q	15.0	832	318	380	347	404	10.0	394	8.5 - 11.0
LT305/55R20 121Q	13.0	844	316	385	344	410	9.5	388	8.5 - 11.0
35x12.50R20 121Q	15.0	883	318	400	347	429	10.0	371	8.5 - 11.0
37x12.50R20 126Q	15.0	934	345	420	376	453	11.0	351	8.5 - 11.0
35x12.50R22 117Q	15.0	883	318	406	347	429	10.0	371	8.5 - 11.0
37x13.50R22 123Q	15.0	934	345	426	376	453	11.0	351	8.5 - 11.0